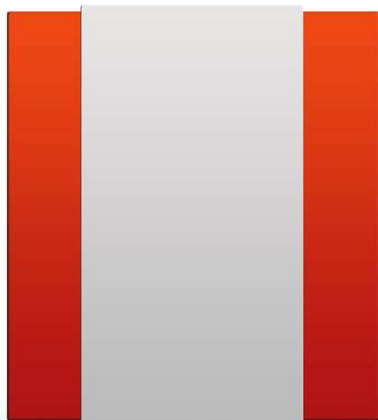


**SL-800**

Wireless Siren and Strobe

**Highlights:** Long lasting LED lights, back up battery, IP55 housing**Specifications**

	SL-800
Receiving frequency	315 MHz ± 75KHz
Firing frequency	433.92MHz ± 75KHz
Transmission Distance	100 m ( Open )
Siren dB	110db
Tamper Switch	YES
Input Voltage	15 V ( Back-up battery: 9.6V / 800mA/h )
Current	≤ 25 mA ( Standby ) ; ≤ 350 mA ( Alarm )
Dimensions	-10°C ~ +50°C
Weight	150 x 127 x 35 mm

**MC-800**

Wireless Magnetic Contact

**Highlights:** Slim and attractive, temporary by-pass switch**Specifications**

	MC-800
Standard Gap distance	≤ 15 mm
Operating Frequency	433.92MHz ± 75KHz
Transmission Distance	80 m ( Open )
Input Voltage	3 V
Current	≤ 10 uA ( Standby ) ; ≤ 15 mA ( Alarm )
Battery Life	> 1 year
Tamper Switch	yes
Installation	With screws or double-sided tape
Dimensions	-10°C ~ +50°C
Weight	64 x 35 x 15 / 60 x 12 x 13 mm

**RC-800**

Wireless Key Fob

**Highlights:** Slim and attractive, easy operation.**Specifications**

	RC-800
Operating Frequency	433.92MHz ± 75KHz
Transmission Distance	100 m ( Open )
Input Voltage	12 V
Current	0 uA ( Standby ) ; ≤ 20 mA ( Alarm )
Battery Life	1 year
Dimensions	-10°C ~ +50°C
Weight	56 x 35 x 11 mm